



LED Spot MR16

TPA/CR-MR16 SMD GU5.3

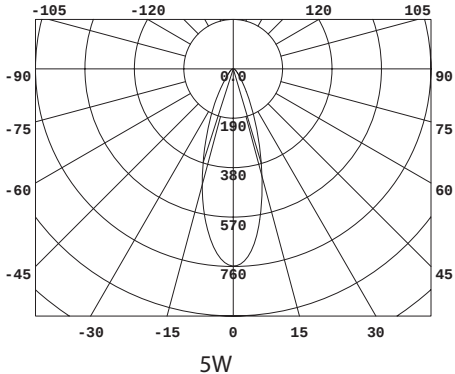

CCT (K): 3000 K / 4000 K / 5700 K

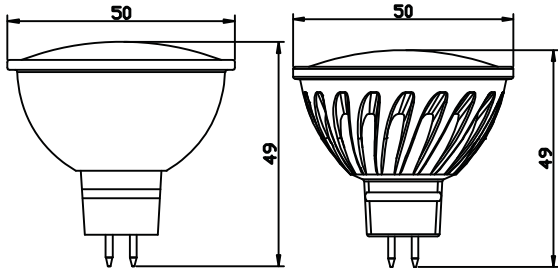

Not Dimmable

Features :

- Excellent optical and driver system to ensure the long lifespan and lighting performance
- Wide beam angle
- Eco-friendly no mercury
- No UV or IR radiation
- Instant start

Item	V	W	PF	Hz	Ra	Lm	Useful Lm	Replace	Life time	Beam angle
MR16 4w Ra80	12V AC/DC	4	>0.6	50/60	>80	300	240	20w	20000h	100°
MR16 5w Ra80	12V AC/DC	5	>0.6	50/60	>80	420	345	35w	20000h	100°