


AWP-DOWNLIGHT with external driver



CCT (K): 3000 K / 4000 K / 5700 K

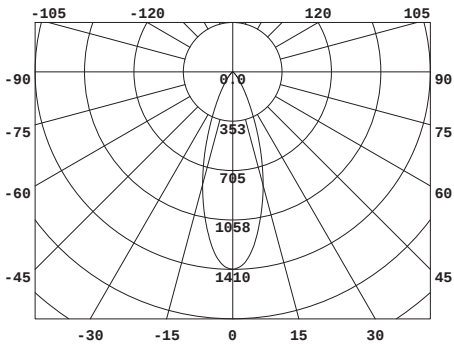

Dimmable and Not Dimmable

Features :

- Easy installation with a modern integrated design
- COB solution, uniform lighting source and no multi shadow
- Different range of beam angles to meet various demand
- Eco-friendly with no mercury, UV or IR radiation

Item	V	W	PF	Hz	Ra	Lm	Useful Lm	Replace	Life time	Beam angle
DOWNLIGHT 9w Ra80	220-240	9	>0.9	50	>80	600	550	50w	30000h	25°/38°/60°
DOWNLIGHT 9w Ra80 DIM	220-240	9	>0.99	50	>80	600	550	50w	30000h	25°/38°/60°
DOWNLIGHT 9w Ra90	220-240	9	>0.9	50	>80	600	550	50w	30000h	25°/38°/60°
DOWNLIGHT 9w Ra90 DIM	220-240	9	>0.99	50	>80	600	550	50w	30000h	25°/38°/60°